




Art.no.: 13385-402

EAN 7320046637163

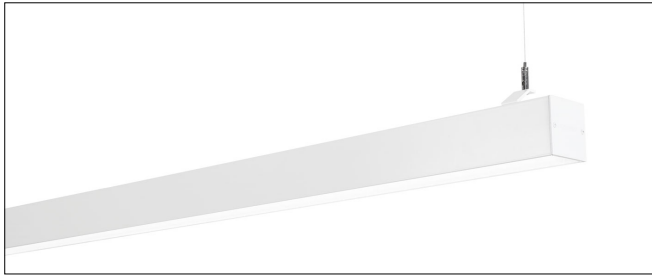

Notor 65 Delta

Direct/indirect, Start/Single, DALI/Phase-pulse, HL

DESIGN

Louvre	Delta	Length, mm	1256
Colour	White	Width, mm	65
RAL	9016	Height, mm	65
Weight, kg	3.6	Module	1200

TECHNICAL DATA

Installation	Start/Single	Max. ambient temperature, °C	25
Protection class	1	Light control	DALI/Phase-pulse
IP rating	20	Brand of driver	Tridonic
Min. ambient temperature, °C	-25		

ELECTRICAL DATA

MCB B10A	13	Rated supply voltage, V	220-240
MCB B16A	22	Mains frequency, Hz	0, 50, 60
MCB C10A	21	Start W	40
MCB C16A	36	Average W	42
Switch control, max no.	25	End W	44
AM	Yes	Power factor, 100 %	0.98
Power on last level	Yes	Surge protection CM, kV/kA	2
Corridor function	Yes	Surge protection DM, kV/kA	1
Stand by W	0.15	THD, %	8

LIGHTING DATA

Light distribution	Direct/indirect	CLO function on	Yes
Lumen output	4750	CLO time, h	50 000
lm/W	119	SDCM	3
Lumen maintenance L100 B50, h	50 000	CRI	80
Lumen maintenance at 50 000 h	1	CCT, K	3000
LED driver, h/max failure %	100000/10	Light source	LED

Suspended or ceiling-mounted workplace luminaire with direct or direct/indirect light. Delta louvres provide high efficiency and optimal lighting comfort. Single or continuous installation.

Installation Single or continuous installation via wire suspension or surface mounted. Installation via wire suspension requires wire brackets which provide flexible c/c, see accessories. Can also be wall mounted with special brackets, see Accessories.

Connection The luminaire is equipped with an access hole for cabling on the top. A special short end with cable entry is used for a surface mounted mains cable, see Accessories. The luminaire unit is equipped with a through-wiring cable (5x1.5 mm²) and a snap-in connection in each end-cap. In a continuous installation, the luminaire row should always begin with a start luminaire. The illuminated corners can be used as a start luminaire and are equipped with through-wiring and quick connection in one end. The corners can only be used in closed systems.

Design Luminaire body enameled in white (RAL 9016) or natural anodised, extruded aluminium finish. The indirect light is covered by an opal film which generates a wide beam and acts as a dust cover. End caps are included in the Start/Single-luminaire.

Louvre Delta – microprism louvre in acrylic (PMMA).

Emergency lighting There is a unit with integrated emLED available for Notor 65, see Accessories.

Dimming CLO (Constant Light Output) and DALI/Phase-pulse control as standard. Suffix number -442 och -449 only refer to single luminaires.

Accessories Assembly fittings and supplementary components, see Accessories.

Miscellaneous CLO (Constant Light Output) maintains the correct light from the luminaire for the duration of its rated life.

The LEDs are protected against contact.

To calculate how many luminaires and accessories you will need to complete a run, please use our

LL=Low Lumen

HL=High Lumen

For exact lengths, please refer to the dimension drawing.