
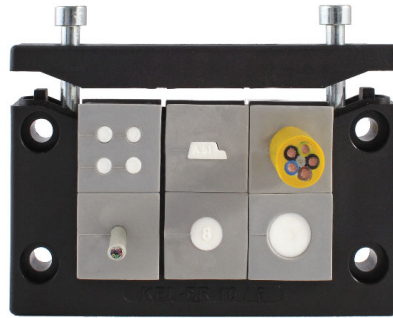


# ST Plugs for Cable Grommets

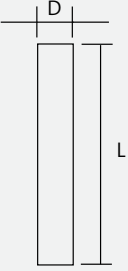

Description	Type	Order No.	Diameter D	Length L	PU
	ST 1	42900	1 mm / 0.039 "	25 mm / 0.984 "	25
	ST 2	42909	2 mm / 0.078 "	25 mm / 0.984 "	25
	ST 3	42901	3 mm / 0.118 "	25 mm / 0.984 "	25
	ST 4	42908	4 mm / 0.157 "	25 mm / 0.984 "	25
	ST 5	42906	5 mm / 0.197 "	25 mm / 0.984 "	25
	ST 6	42903	6 mm / 0.236 "	25 mm / 0.984 "	25
	ST 7	42905	7 mm / 0.276 "	25 mm / 0.984 "	25
	ST 8	42899	8 mm / 0.315 "	20 mm / 0.787 "	25
	ST 9	42897	9 mm / 0.354 "	20 mm / 0.787 "	25
	ST 10	42895	10 mm / 0.394 "	20 mm / 0.787 "	25
	ST 11	42893	11 mm / 0.433 "	20 mm / 0.787 "	25
	ST 12	42891	12 mm / 0.472 "	20 mm / 0.787 "	25
	ST 13	42889	13 mm / 0.512 "	20 mm / 0.787 "	25
	ST 14	42887	14 mm / 0.551 "	20 mm / 0.787 "	25
	ST 15	42885	15 mm / 0.591 "	20 mm / 0.787 "	25
	ST 16	42883	16 mm / 0.63 "	20 mm / 0.787 "	25
	ST 17	42881	17 mm / 0.669 "	20 mm / 0.787 "	25
ST ASI	42877	-	25 mm / 0.984 "	25	

## Product Description

Plugs are used to close either KT or QT grommets which are not equipped with cables. IP ratings of the grommets remain.

Perfect for applications where cables have been removed or might be routed at a later stage.

## Advantages & Benefits

- Sealing unused cable grommets

## Specifications

Material	Polyamide (PA), white
Flame class	UL94-Vo
IP rating	IP rating of grommets remains
UL type rating	UL type 12 (acc. to UL 50E)
Operating temperature	- 40°C to + 120°C - 40°F to + 248°F
Properties	Halogen-free, silicone-free

## Compatible with

- KT Cable grommets 48 - 52
- QT Cable grommets 70