

KVT

Split Cord Grips



Product Description

KVT is a circular split frame for quick and easy installation and sealing of cables with connectors or complete cable harnesses.

Polyamide locknuts as well as a sealing ring are included in the shipment.

For routing D-Sub, DVI or PROFIBUS connectors in combination with the split cord grips KVT, special locknuts with cut-outs are required.

Locknuts

Locknuts with special cut-outs are available separately. The cut-out dimensions are listed on page 208.









KGM-SUB-D9 fits D-Sub 9 connectors
(Required wall cut-out: \varnothing 36 mm / 1.417", PU: 10)
 Order No. 45105 Order No. 45106

KGM-PB fits DVI and PROFIBUS connectors
(Required wall cut-out: \varnothing 42 mm / 1.654", PU: 10)
 Order No. 45107 Order No. 45109

KGM-SUB-D25 fits SUB-D25 connectors (Required wall cut-out: \varnothing 50 - 54 mm / 1.969 - 2.126", PU: 10)
 Order No. 45108 Order No. 45110



Type GMT: Split locknut, p. 209

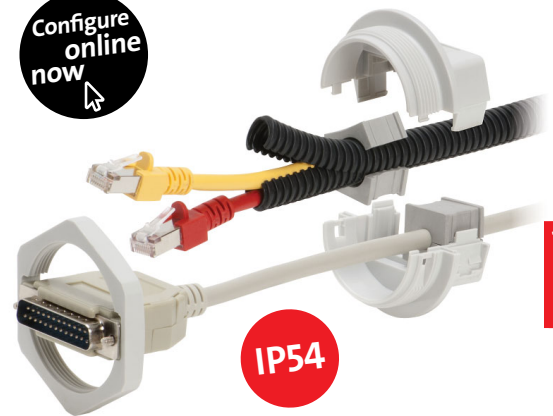
Description	Type	Order No	Grommets small large	Thread Thread length	PU
	KVT 20**	<input type="checkbox"/> 45034 <input checked="" type="checkbox"/> 45024	1 -	M20 x 1.5 Length: 14 mm / 0.551"	10
	KVT 25***	<input type="checkbox"/> 45035 <input checked="" type="checkbox"/> 45025	1 -	M25 x 1.5 Length: 14 mm / 0.551"	10
	KVT 32	<input type="checkbox"/> 45036 <input checked="" type="checkbox"/> 45026	1 -	M32 x 1.5 Length: 14 mm / 0.551"	10
	KVT 32 + KGM-SUB-D9	<input type="checkbox"/> 45037 <input checked="" type="checkbox"/> 45027	1 -	M32 x 1.5 Length: 14 mm / 0.551"	10
	KVT 40	<input type="checkbox"/> 45203 <input checked="" type="checkbox"/> 45028	1 -	M40 x 1.5 Length: 14 mm / 0.551"	10
	KVT 40 + KGM-PB	<input type="checkbox"/> 45205 <input checked="" type="checkbox"/> 45029	1 -	M40 x 1.5 Length: 14 mm / 0.551"	10





* Only valid for gray product types ** Max. cable diameter of 11 mm | *** Max. cable diameter of 15 mm / 0.591"

KVT Split Cord Grips



Configure online now

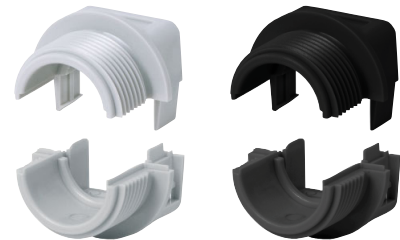


Description	Type	Order.No.	Grommets small large	Thread Thread length	PU
	KVT 50 2	45204	2 -	M50 × 1.5	5
		45030		Length: 14 mm / 0.551"	
	KVT 50 2 + KGM-SUB-D25	45206	2 -	M50 × 1.5	5
		45031		Length: 14 mm / 0.551"	
	KVT 63 1	45212	- 1	M63 × 1.5	5
		45112		Length: 14 mm / 0.551"	
	KVT 63 4	45215	4 -	M63 × 1.5	5
		45115		Length: 14 mm / 0.551"	

* Only valid for gray product types

Advantages & Benefits

- Insertion of pre-terminated cables
- Maintain manufacturer's warranty on pre-terminated cables
- Retrofits, repairs and maintenance can be done much more easily and quickly
- High cable density, wide variety of grommets
- Suitable for metric cut-outs
- Locknut is included



Specifications

Material	Polycarbonate (PC)
Color	<input type="checkbox"/> gray (similar RAL 7035) <input checked="" type="checkbox"/> black
Flame class	UL94-Vo
IP rating	IP54, with gasket and correct selection of the cable grommets (certified acc. to EN 60529)
UL type rating	UL type 12 (acc. to UL 50E)
Operating temperature	- 30°C to + 100°C (static) - 22°F to + 212°F (static)
Properties	Halogen-free, silicone-free
Cut-out dimension	Metric sizes

Accessories

KT Cable grommets	48 - 52
AT Adapter grommets	54 - 57
KVT-EMC Brackets	151
Locknuts	208 - 209
ST Plugs	53