

# KEL-ER-B

## Cable Entry Frames




V2A anti-corrosive

Also available with stainless steel screws (V2A).




Also available with threaded bushings.





Split KT grommets

Configure online now

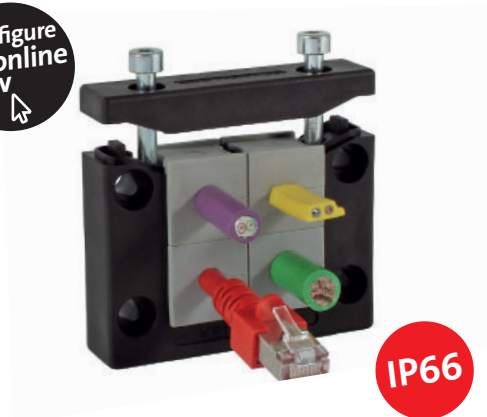

1.11

Description	Type	Order No.	Grommets small   large	PU
	KEL-ER-B4	48204	4 -	10
	KEL-ER-B4 with V2A screws	48204.200	4 -	10
	KEL-ER-B1	48206	- 1	10
	KEL-ER-B1 with V2A screws	48206.200	- 1	10

### Product Description

Split cable entry system for routing and sealing cables with connectors, providing an IP66 / up to UL type 4X rating and strain relief for cable diameters from 1 to 16 mm (KT 1 - 15) and 16 to 35 mm (KT 16 - 34).

The new cable entry system is easy to install. Cable grommets are placed into compartments in the frame and are securely fixed to the frame during assembly. The KEL-ER-B frame matches exactly the cut-out dimensions of 46 × 46 mm measuring instruments. All frame systems come with a rubber gasket.

### Advantages & Benefits

- Maintain manufacturer's warranty on pre-terminated cables
- Retrofits, repairs and maintenance can be done much more easily and quickly
- Small cut-out, high cable density
- Strain relief according to EN 62444
- High stability, vibration resistant

### Specifications

Material	Polyamide (PA)
Flame class	UL94-Vo
IP rating	IP66, with gasket and correct selection of single grommets (certified acc. to EN 60529)
UL type rating	UL type 4X (acc. to UL 50E)
Operating temperature	- 40°C to + 140°C (static) - 40°F to + 284°F (static)
Properties	Halogen-free, silicone-free
Cut-out dimensions	46 × 46 mm / 1.811 x 1.811" / Page 220-221
Frame depth	17 mm / 0.669"

### Accessories

KT Cable grommets	48 - 52
AT Adapter grommets	54 - 57
KEL-EMC Grounding mounts	148 - 150
ST Plugs	53